

PTK1500 BIN ACTIVATOR

Bin Activators are equipment conically shaped that aid dry bulk material flow from storage silos, or hoppers.


DATASHEET

CONSTRUCTION MATERIALS		FORCE	POWER	POWER SUPPLY	WEIGHT
<ul style="list-style-type: none"> ST37 Carbon Steel AISI304 Stainless Steel 	<ul style="list-style-type: none"> Hardox Steel AISI316 Stainless Steel 	7140 N	0,62 kW	220 V - 575 V 50 Hz or 60 Hz 3 Phase	547 kg

NUMBER OF OUTLETS	NUMBER OF DAMPERS	NUMBER OF MOTORS	FEATURES
1	12	1	Counter flange Polyurethane flexible joint

DIMENSIONS

A (mm) : 1115
Ø DI (mm) : 1480

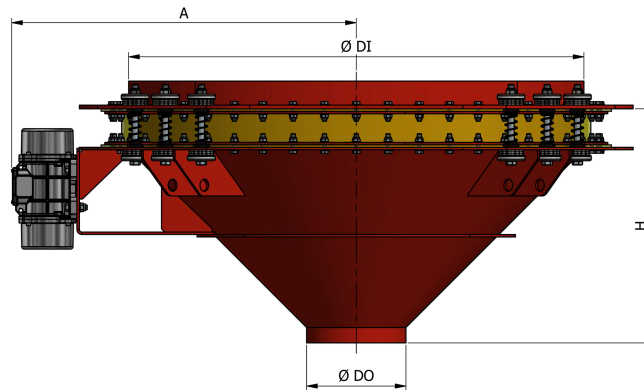

Ø DO (mm) : 323
H (mm) : 760

TECHNICAL DRAWING

