

PTK2500 BIN ACTIVATOR


Bin Activators are equipment conically shaped that aid dry bulk material flow from storage silos, or hoppers.

DATASHEET

CONSTRUCTION MATERIALS		FORCE	POWER	POWER SUPPLY	WEIGHT
<ul style="list-style-type: none"> ST37 Carbon Steel AISI304 Stainless Steel 	<ul style="list-style-type: none"> Hardox Steel AISI316 Stainless Steel 	13640 N	0,7 kW	220 V - 575 V 50 Hz or 60 Hz 3 Phase	1722 kg
NUMBER OF OUTLETS	NUMBER OF DAMPERS	NUMBER OF MOTORS	FEATURES		
1	16	2	Counter flange Polyurethane flexible joint		

DIMENSIONS

A (mm) : 1720
Ø DI (mm) : 2480

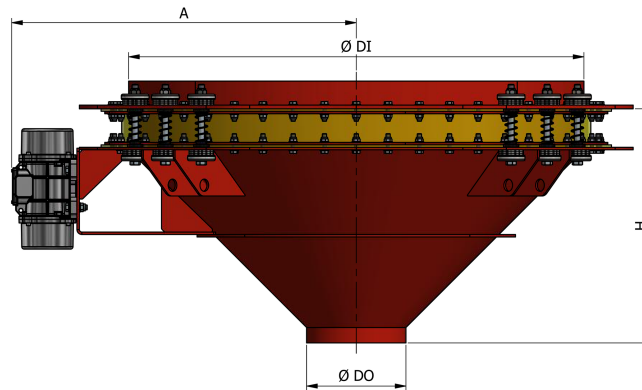

Ø DO (mm) : 406
H (mm) : 1290

TECHNICAL DRAWING

